

2301E-ST

Steam Turbine Control for Small Generator Applications

Applications

The 2301E-ST is a steam turbine control with internal algorithms designed to start/stop, control, and protect a small steam turbine driving a generator, pump, or compressor. This control's field configurability allows it to be easily configured by the user for a diverse range of applications. The 2301E-ST's integrated generator power sensor and load-sharing capabilities also make it ideal for small turbine generator sets where a cost-effective control solution is essential.



The 2301E-ST controller includes the following basic turbine control and protection functions:

- Turbine speed control
- Start valve ramp (0 to 100%)
- Manual start, Semi-automatic start, Automatic start option
- Shutdown logic
- Alarm logic
- Overspeed protection
- Platform diagnostics and watchdog protection
- Self-powered actuator option
- Woodward Control Assistant service tool communications

Alternatively, the following functions can be configured, depending on application requirements (I/O limitations may prohibit selecting all listed functions at once):

- Critical speed avoidance band logic
- Process control
- Remote speed/load setpoint
- Droop/Isochronous generator control
- kW/Actuator droop
- Two speed-sensor inputs (required to meet standard API-611 requirements)
- Generator load sharing (with soft load/unload transfer)
- Generator synchronizer input (SPM-A or SPM-D)
- Generator power-sensing input (PTs and CTs)
- Optional operator monitoring panel (downloadable from Woodward website)
- Serial Modbus® *communications

An integral serial RS-422 communications port allows users to interface with the 2301E-ST through industry-standard Modbus protocol.

* Modbus is a trademark of Schneider Automation Inc.

- Single-valve small steam turbine applications
- API-611 compliant
- Accepts two speed sensors
- Process control capability
- Load sharing and speed control capability
- kW or speed droop
- Isochronous control capability
- Soft load transfer
- Remote setpoint
- Critical speed avoidance
- PC configurable with Service Tool
- Designed for turbines operating at 90–32 000 rpm
- Actuator current range of 4–20 mA or 20–200 mA
- 2301A/D replacement
- Modbus® serial
- Optional Hazardous Location models

Description

The Woodward 2301E-ST is a microprocessor-based control with integral application software designed for single-valve steam turbine applications. This control is packaged in a ruggedized sheet-metal chassis and consists of a single printed circuit board. Depending on the desired mounting location, the following two models are available:

- (1) Ordinary Location rated model
- (2) Hazardous Location Class I, Division 2 rated model

Refer to product manual 26694 for a list of model numbers and related product details.

This control is designed to perform the core control and protection functions of a small steam turbine package. The application software is field configurable, allowing it to be configured and modified to meet site-specific requirements. Modbus communications also allow it to easily interface with a package PLC (programmable logic controller) or plant DCS (distributed control system).

The 2301E-ST control is configured and serviced (dynamic adjustments made) via a computer connected to the control's RS-232 communications port. These configuration and dynamic settings are set, changed, tuned, and saved via a computer using Woodward's user-friendly Control Assistant software program. This Windows® based software program allows users to easily set and adjust all application-based parameters, plus upload and download configurations to and from the control.

The 2301E-ST hardware includes the following inputs and outputs:

- (1) 24 Vdc input power source
- (2) MPU speed sensors
- (1) Actuator driver
- (2) Configurable analog inputs
- (1) Configurable analog output
- (8) Discrete contact inputs
- (4) Discrete "relay driver" outputs
- (1) Load sharing circuit
- (1) Load sensor (3 PT inputs, 3 CT inputs)

Control Features

Turbine Start-up/Shutdown

The 2301E-ST provides configurable turbine start-up scheduling via special valve ramp logic. On start-up, the turbine accelerates according to the valve ramp schedule until the speed control loop takes control of the turbine. The valve ramp can also be used to shut down the turbine.

Isochronous/Droop Operation

When configured for generator drive applications, the 2301E-ST can operate in either an isochronous or droop load mode. In the "Isochronous" mode, the 2301E-ST controls plant/unit frequency control by maintaining turbine speed. In the "Droop" mode the 2301E-ST controls generator load. If the generator is connected to the utility bus while in droop mode, the unit speed will be determined entirely by the bus frequency. If the generator is disconnected from the utility bus, the unit speed will "droop" as the load increases.

kW Droop Operation

If kW droop is configured, the control uses the output from its integral power sensor to sense and control unit load. The control's power sensor output can be monitored via serial communications or through the control's analog readout. If required, any of the control's four relay outputs can be configured as a power level switch to drive auxiliary devices or indicators.

Isochronous Load Sharing

The 2301E-ST includes an analog load sharing network input, which is compatible with Woodward's 2301A line of controls. The control's soft load/unload transfer function can also be configured to rate limit unit loading and unloading.

DSLTM-2, SPM-A or SPM-D Compatible Input

Optionally, one of the 2301E-ST's analog inputs can be configured to accept a bi-polar signal from Woodward's DSLC-2 (Digital Synchronizer and Load Control) or Woodward's SPM-A or SPM-D synchronizers.

Critical Speed Avoidance

The 2301E-ST can be configured to provide one speed band/range to be avoided for turbine protection. Within the set critical speed avoidance band the turbine speed setpoint will rapidly ramp through the critical speed range at the set rate.

Remote Speed/Load Setpoint

Optionally, one of the control's two analog inputs can be configured to remotely control the control's speed/load setpoint. The maximum rate at which the speed/load setpoint can be changed by the remote input is configurable by the user. The remote speed/load setpoint can be enabled and disabled from a contact input or via Modbus communications.

Process Control

A process PID control function can be configured to receive an analog process input signal, compare this signal to a setpoint and vary the turbine speed or load to maintain the desired process operating point. The process setpoint is adjustable by raise/lower contact inputs, via Modbus communications or a configurable remote 4–20 mA setpoint signal.

Communications


The 2301E-ST's RS-232 port is used to interface with Windows-based PC program "Control Assistant" installed and used on a computer connected to this port. The Control Assistant software program is downloadable from Woodward's software web page and is used to set and adjust all application-based parameters, plus upload and download configuration setting files to and from the control.

The 2301E-ST's RS-422 port communicates via an industry standard Modbus protocol and can be used to monitor all turbine-specific parameters as well as control the unit (start, stop, etc.) as the application requires. Optionally, a software-based operator monitoring tool can be downloaded from Woodward's software web page, installed on a computer, and used to monitor all sensed turbine parameters (speed, load, inputs outputs, alarms, shutdown events, etc.)

Specifications

PHYSICAL	
Dimensions, Ordinary Location Model	387.85 x 158.50 x 50.8 mm (15.25 x 7.1 x 2 inches)
Dimensions, Hazardous Location Model	390.5 x 254 x 66 mm (15.375 x 10 x 2.6 inches)
Weight	1.75 kg / 3.86 lb
Mounting	Any attitude (bolt patterns & sizes are determined by model number)
ENVIRONMENTAL	
Operating Temperature Range	–40 to +70 °C (–40 to +158 °F)
Storage Temperature Range	–40 to +105 °C (–40 to +221 °F)
Shock	US MIL-STD 810C, Method 516.2
ELECTRICAL	
Input Power Source	18–36 Vdc @ 0.43 A steady state, 7 A peak (100 ms)
Power Consumption	< 20 W nominal
Speed Input Signals	100–24 950 Hz, (90–32 000 rpm) @ 1.7–35 Vac
PT Input Signals	90–240 Vac (3 phase)
CT Input Signals	0–7.2 A (3 phase)
Synchronizer Input Signal	+2.5 Vdc (DSL-2, SPM-A or SPM-D)
Actuator Output Signal	4–20 mA or 0–200 mA
Analog Input Signals	4–20 mA
Discrete Input Signals	3 mA @ 24 Vdc
Discrete Input Signals	4–20 mA
Discrete Output Signals	Solid state relay driver powered by external +24 Vdc source, max current 200 mA
Service Tool Port (J1)	RS-232 communications to Woodward Control Assistant / Service Tool
Communication Port (J2)	RS-422, 9-pin connector, 9600 to 115 200 baud, full duplex

Dimensions

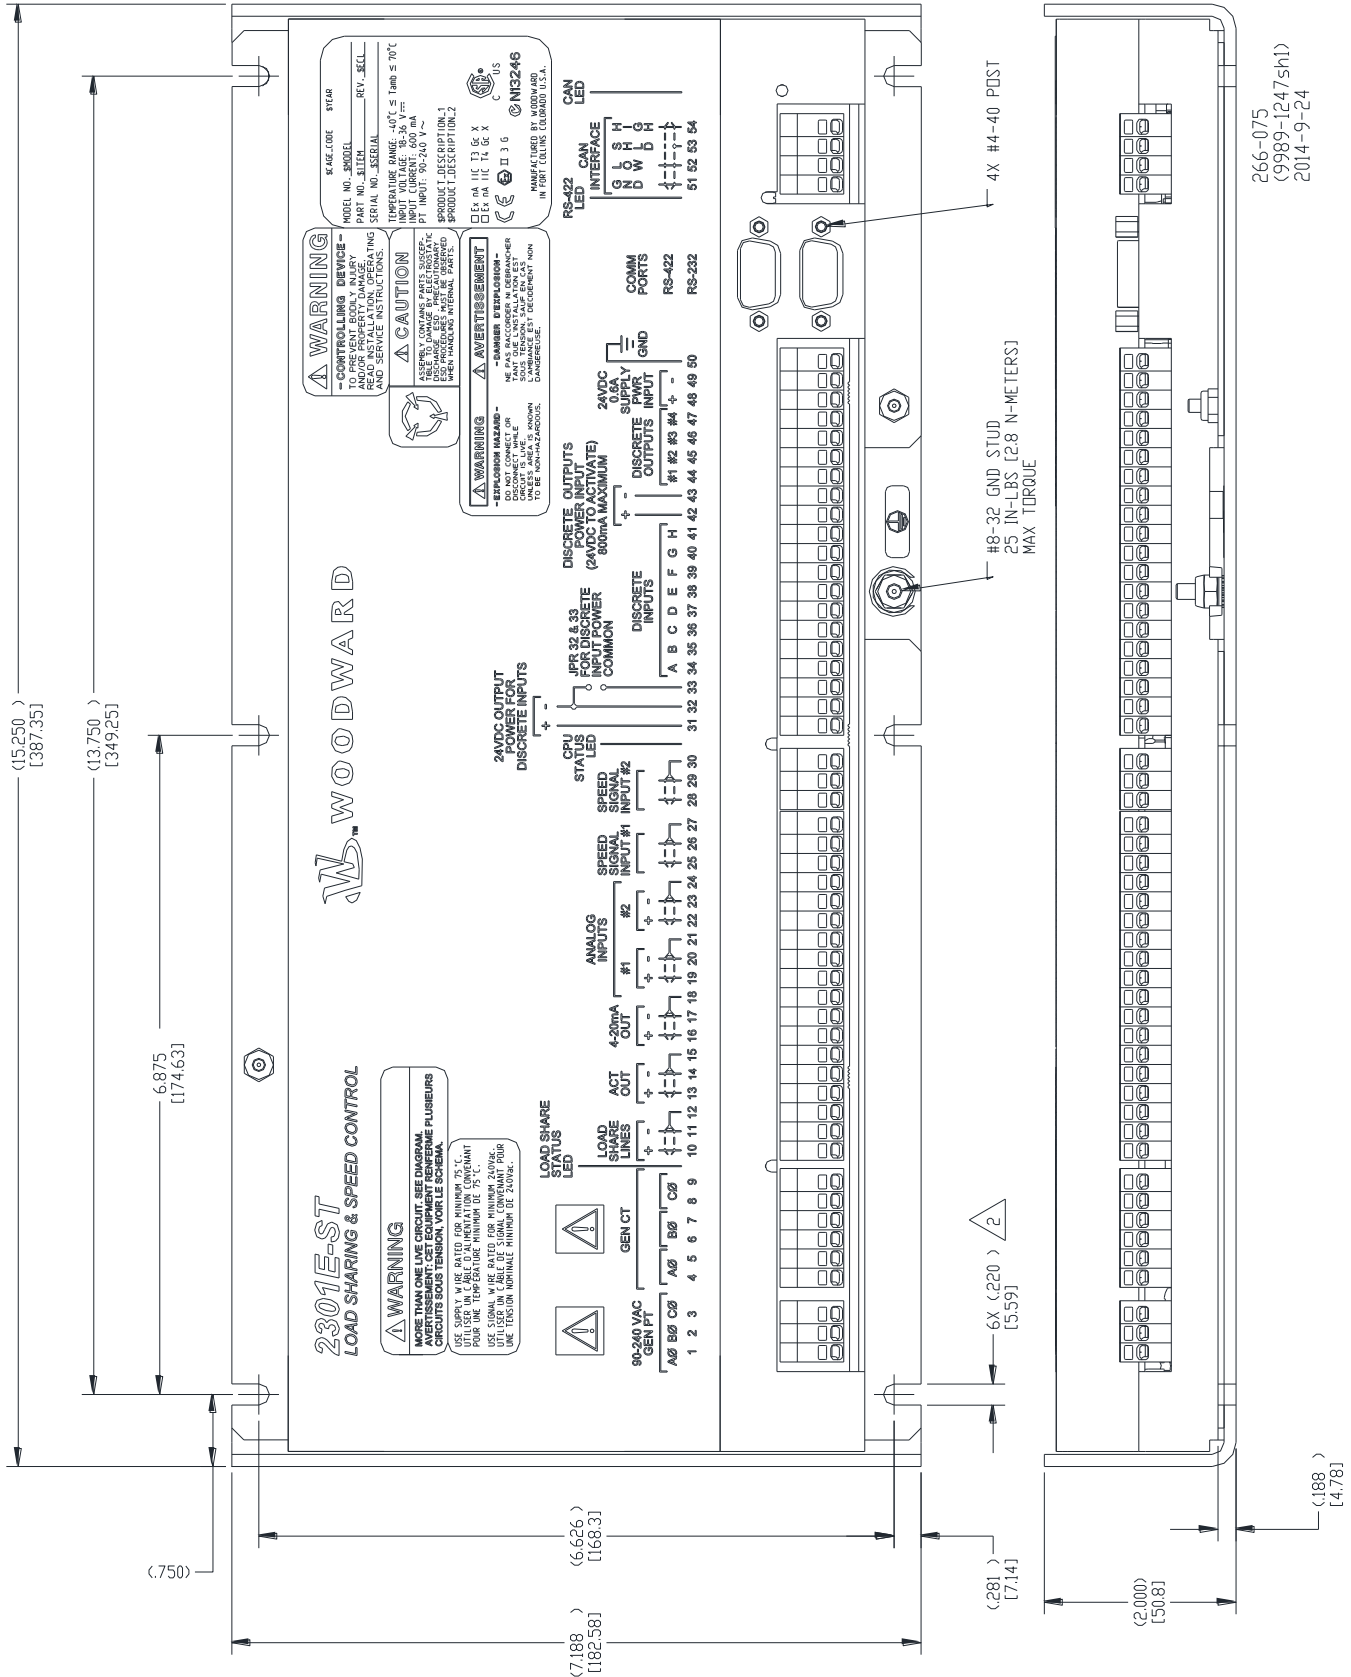

266-075
(9989-1247sh1)
2014-9-24

2301E-ST Digital Control (Ordinary Locations model shown)
Do not use for construction

Regulatory Compliance

European Compliance for CE Mark:

EMC Directive Declared to 2014/30/EU

Low Voltage Directive Declared to 2014/35/EU

ATEX – Potentially Explosive Atmospheres Directive Declared to 2014/34/EU

Zone 2, Category 3, Group II G, Ex nA IIC T3 Gc X

Zone 2, Category 3, Group II G, Ex nA IIC T4 Gc X

Marine Compliance Certificates:

American Bureau of Shipping, Bureau Veritas, China Classification Society, Det Norske Veritas, Lloyd's Register of Shipping, Nippon Kaiji Kyokai, Royal Institution of Naval Architects

North American Compliance:

CSA (CSA Certified for Class I, Division 2, Groups A, B, C, D, T3 or T4 Hazardous Locations and ordinary locations at 70 °C ambient; for use in Canada and the United States; NOTE—Wiring must be in accordance with applicable electric codes with the authority having jurisdiction. These listings are limited to those units bearing the UL or CSA agency identification.)

NOTE—Certain certifications apply to specific models only. See product manual 26694 for complete information. Note that the manual is also embedded in the control software service tool.



PO Box 1519, Fort Collins CO 80522-1519, USA
1000 East Drake Road, Fort Collins CO 80525, USA
Phone +1 (970) 482-5811 • Fax +1 (970) 498-3058
Email and Website—www.woodward.com

Woodward has company-owned plants, subsidiaries, and branches, as well as authorized distributors and other authorized service and sales facilities throughout the world. Complete address / phone / fax / email information for all locations is available on our website.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward contractual or warranty obligation unless expressly stated in a written sales contract.

Copyright © Woodward 2014-2016, All Rights Reserved

For more information contact: